



Pan-Ty® Cable Ties – Metal Detectable Nylon 6.6 and Polypropylene

- Metal impregnated material allows identification by metal detectors or x-ray inspection equipment to help meet food, beverage, and pharmaceutical safety standards, to help reduce product contamination, loss, and recall
- Nylon material for general purpose maintenance and repair applications; ideal for use in control panels and overhead cable runs

- Polypropylene material provides excellent chemical resistance for use in processing and packaging areas where aggressive acid and alkaline chemicals are used to clean the equipment
- One-piece construction for consistent performance and reliability
- Among the lowest threading force of any one-piece cable tie in the industry
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

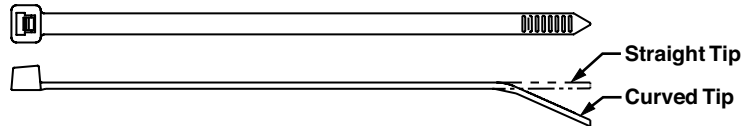

| Part Number | Length | | Width | | Thickness | | Max. Bundle Dia. | | Min. Loop Tensile Str. | | Recommended Installation Tool | Material | Std. Pkg. Qty. | Std. Ctn. Qty. |
|---|--------|-----|-------|-----|-----------|-----|------------------|-----|------------------------|-----|--------------------------------------|---------------|----------------|----------------|
| | In. | mm | In. | mm | In. | mm | In. | mm | Lbs. | N | | | | |
| Nylon 6.6 | | | | | | | | | | | | | | |
| Miniature Cross Section | | | | | | | | | | | | | | |
| PLT1M-C86 | 3.9 | 100 | 0.098 | 2.5 | 0.044 | 1.1 | .87 | 22 | 18 | 80 | GTS-E, GS2B, STS2 | Nylon 6.6 | 100 | 1000 |
| Intermediate Cross Section | | | | | | | | | | | | | | |
| PLT2I-C86 | 8.0 | 203 | 0.135 | 3.4 | 0.047 | 1.2 | 2.00 | 51 | 40 | 178 | GTS-E, GS2B, STS2 | Nylon 6.6 | 100 | 1000 |
| Standard Cross Section | | | | | | | | | | | | | | |
| PLT2S-C86 | 7.3 | 186 | 0.190 | 4.8 | 0.057 | 1.4 | 1.85 | 47 | 50 | 222 | GTS-E, GS2B, GTH-E, GS4H, STS2, STH2 | Nylon 6.6 | 100 | 1000 |
| PLT3S-C86 | 11.5 | 291 | 0.190 | 4.8 | 0.057 | 1.4 | 3.00 | 76 | 50 | 222 | | Nylon 6.6 | 100 | 1000 |
| PLT4S-C86 | 14.4 | 366 | 0.190 | 4.8 | 0.057 | 1.4 | 4.00 | 102 | 50 | 222 | | Nylon 6.6 | 100 | 1000 |
| Light-Heavy Cross Section (Straight Tip) | | | | | | | | | | | | | | |
| PLT3H-L86 | 11.1 | 282 | 0.300 | 7.6 | 0.075 | 1.9 | 3.00 | 76 | 120 | 534 | GTH-E, GS4H, GS4EH, STH2, ST3EH | Nylon 6.6 | 50 | 500 |
| PLT4H-L86 | 14.4 | 366 | 0.300 | 7.6 | 0.075 | 1.9 | 4.00 | 102 | 120 | 534 | | Nylon 6.6 | 50 | 500 |
| Polypropylene | | | | | | | | | | | | | | |
| Miniature Cross Section | | | | | | | | | | | | | | |
| PLT1M-C186 | 3.9 | 100 | 0.098 | 2.5 | 0.044 | 1.1 | 0.87 | 22 | 15 | 67 | GTS-E, GS2B, STS2 | Polypropylene | 100 | 1000 |
| Intermediate Cross Section | | | | | | | | | | | | | | |
| PLT2I-C186 | 8.0 | 203 | 0.135 | 3.4 | 0.047 | 1.2 | 2.00 | 51 | 24 | 107 | GTS-E, GS2B, STS2 | Polypropylene | 100 | 1000 |
| Standard Cross Section | | | | | | | | | | | | | | |
| PLT2S-C186 | 7.3 | 186 | 0.190 | 4.8 | 0.057 | 1.4 | 1.85 | 47 | 30 | 133 | GTS-E, GS2B, GTH-E, GS4H, STS2, STH2 | Polypropylene | 100 | 1000 |
| PLT3S-C186 | 11.5 | 291 | 0.190 | 4.8 | 0.057 | 1.4 | 3.00 | 76 | 30 | 133 | | Polypropylene | 100 | 1000 |
| PLT4S-C186 | 14.4 | 366 | 0.190 | 4.8 | 0.057 | 1.4 | 4.00 | 102 | 30 | 133 | | Polypropylene | 100 | 1000 |
| Light-Heavy Cross Section (Straight Tip) | | | | | | | | | | | | | | |
| PLT3H-L186 | 11.1 | 282 | 0.300 | 7.6 | 0.075 | 1.9 | 3.00 | 76 | 60 | 267 | GTH-E, GS4H, GS4EH, STH2, ST3EH | Polypropylene | 50 | 500 |
| PLT4H-L186 | 14.4 | 366 | 0.300 | 7.6 | 0.075 | 1.9 | 4.00 | 102 | 60 | 267 | | Polypropylene | 50 | 500 |



| Part Number | Material | Used with Cable Ties* | A Lgth. In. mm | B Width In. mm | C Ht. In. mm | Counterbore Diameter In. (mm) | Mounting Method | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------------------|---------------|-----------------------|----------------|----------------|--------------|-------------------------------|-----------------|----------------|----------------|
| Cable Tie Mounts | | | | | | | | | |
| TM2S8-C86 | Nylon 6.6 | Min., Int., Std. | 0.630 (16.0) | 0.422 (10.7) | 0.275 (7.0) | 0.325 (8.3) | #8 (M4) screw | 100 | 500 |
| TM3S8-C86 | | Std., Lt. Hvy. | 0.867 (22.0) | 0.614 (15.6) | 0.373 (9.5) | 0.325 (8.3) | #8 (M4) screw | 100 | 500 |
| TM3S10-C86 | | | | | | | #10 (M5) screw | 100 | 500 |
| TM2S8-C186 | Polypropylene | Min., Int., Std. | 0.630 (16.0) | 0.422 (10.7) | 0.275 (7.0) | 0.325 (8.3) | #8 (M4) screw | 100 | 500 |
| TM3S8-C186 | | Std., Lt. Hvy. | 0.867 (22.0) | 0.614 (15.6) | 0.373 (9.5) | 0.325 (8.3) | #8 (M4) screw | 100 | 500 |
| TM3S10-C186 | | | | | | | #10 (M5) screw | 100 | 500 |