


### Pan-Ty® Marker and Flag Ties

- Natural nylon material for indoor use
- Weather resistant material has greater resistance to damage caused by ultraviolet light – indoor or outdoor use
- Flame retardant material has a flammability rating of UL 94V-0 – for indoor use
- Used to fasten and identify bundles at the same time
- One-piece construction for consistent performance and reliability
- Can be marked with Panduit® marker pens on page B1.49 or computer printable labels
- Custom imprinting with text, symbols, or trademarks available using Panduit Custom Hot Stamping Service, see page B1.89
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

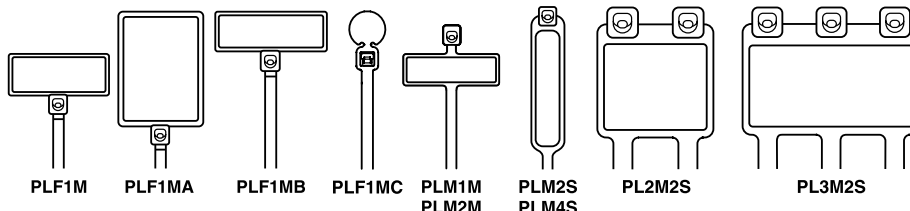

Part Number	Marker Type	Length		Width		Thickness		Marker Write-On Area		Max. Bundle Dia.		Min. Loop Tensile Str.		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm	Lbs.	N			
<b>Nylon 6.6</b>																
<b>Miniature Cross Section</b>																
PLF1M-C	Flag	4.3	109	0.098	2.5	0.045	1.1	0.31 x 0.75	7.9 x 19.1	0.87	22	18	80	GTS-E, GS2B, PTS, PPTS, STS2	100	1000
PLF1MA-C	Flag	5.1	130	0.098	2.5	0.045	1.1	0.76 x 1.04	19.1 x 26.4	0.87	22	18	80		100	1000
PLF1MB-C	Flag	4.0	101	0.098	2.5	0.045	1.1	0.31 x 0.92	7.9 x 23.4	0.75	19	18	80		100	1000
PLF1MC-M	Flag	4.3	109	0.098	2.5	0.045	1.1	0.29 x 0.32	7.4 x 8.0	0.87	22	18	80		1000	25000
PLM1M-C	Wrap	3.9	99	0.098	2.5	0.035	0.9	0.26 x 0.95	6.6 x 24.1	0.75	19	18	80		100	1000
PLM2M-C	Wrap	8.0	203	0.098	2.5	0.035	0.9	0.26 x 0.95	6.6 x 24.1	2.00	51	18	80	100	1000	

<b>Standard Cross Section</b>																
PLM2S-C	Wrap	7.4	188	0.185	4.7	0.052	1.3	0.44 x 0.87	11.1 x 22.1	1.75	45	50	222	GTS-E, GS2B, GTH-E, GS4H, PTS, PTH, PPTS, STS2, STH2	100	1000
PLM4S-C	Wrap	14.6	371	0.185	4.7	0.052	1.3	0.44 x 2.00	11.1 x 50.8	4.00	102	50	222		100	1000
PL2M2S-L	Wrap	7.4	188	0.185	4.7	0.052	1.3	0.87 x 1.07	22.1 x 27.2	1.75	45	50	222		50	500
PL3M2S-L	Wrap	7.4	188	0.185	4.7	0.052	1.3	0.87 x 1.79	22.1 x 45.5	1.75	45	50	222		50	500

<b>Weather Resistant Nylon 6.6</b>																
<b>Miniature Cross Section</b>																
PLF1M-C0	Flag	4.3	109	0.098	2.5	0.045	1.1	0.31 x 0.75	7.9 x 19.1	0.87	22	18	80	GTS-E, GS2B, PTS, PPTS, STS2	100	1000
PLF1MA-M0	Flag	5.1	130	0.098	2.5	0.045	1.1	0.76 x 1.04	19.1 x 26.4	0.87	22	18	80		1000	10000
PLM1M-C0	Wrap	3.9	99	0.098	2.5	0.035	0.9	0.26 x 0.95	6.6 x 24.1	0.75	19	18	80		100	1000
PLM2M-M0	Wrap	8.0	203	0.098	2.5	0.035	0.9	0.26 x 0.95	6.6 x 24.1	2.00	51	18	80		1000	25000

<b>Standard Cross Section</b>																
PLM2S-C0	Wrap	7.4	188	0.185	4.7	0.052	1.3	0.44 x 0.87	11.1 x 22.1	1.75	45	50	222	GTS-E, GS2B, GTH-E, GS4H, PTS, PTH, PPTS, STS2, STH2	100	1000
PLM4S-D0	Wrap	14.6	371	0.185	4.7	0.052	1.3	0.44 x 2.00	11.1 x 50.8	4.00	102	50	222		500	5000
PL2M2S-L0	Wrap	7.4	188	0.185	4.7	0.052	1.3	0.87 x 1.07	22.1 x 27.2	1.75	45	50	222		50	500
PL3M2S-D0	Wrap	7.4	188	0.185	4.7	0.052	1.3	0.87 x 1.79	22.1 x 45.5	1.75	45	50	222		500	2500

<b>Flame Retardant Nylon 6.6</b>																
<b>Miniature Cross Section</b>																
PLF1M-M69	Flag	4.3	109	0.098	2.5	0.045	1.1	0.31 x 0.75	7.9 x 19.1	0.87	22	18	80	GTS-E, GS2B, PTS, PPTS, STS2	1000	25000
PLM1M-M69	Wrap	3.9	99	0.098	2.5	0.035	0.9	0.26 x 0.95	6.6 x 24.1	0.75	19	18	80		1000	25000