




Belt-Ty™ In-Line Cable Ties – Nylon and Weather Resistant Nylon 6.6

- Natural nylon material for indoor use
- Weather resistant material has greater resistance to damage caused by ultraviolet light – indoor or outdoor use
- Parallel-entry cable tie that threads like a belt (180° entry)
- Low profile head avoids snags and reduces overall bundle size
- Up to 35% lower head height than conventional 90° ties

- Parallel-entry limits exposure to sharp edges and protects workers' arms/hands
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation
- Nylon 6.6 cable ties are UL Listed for use in plenum or air handling spaces per NEC

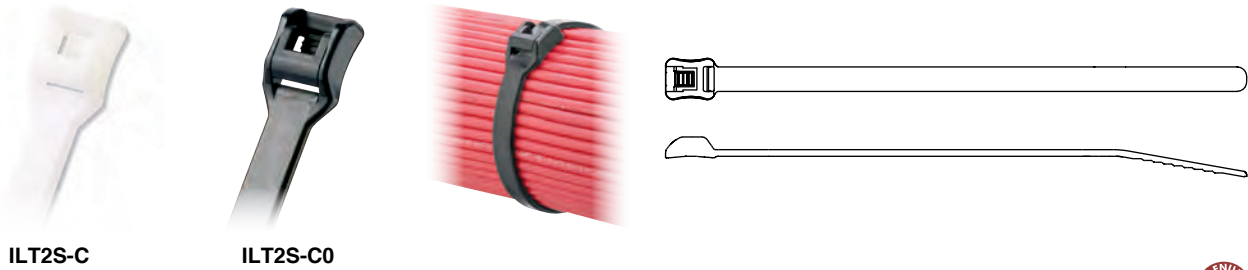

Part Number	Length		Width		Thickness		Max. Bundle Dia.		Min. Loop Tensile Str.		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	In.	mm	Lbs.	N			

Nylon 6.6 – Black

Standard Cross Section – Plenum-Rated

ILT2S-C	8.3	211	0.190	4.8	0.052	1.3	1.88	48	50	222	GTS-E, GS2B, GTH-E, GS4H, PTS, PTH, PPTS, STS2, STH2	100	1000
ILT3S-C	11.5	292	0.190	4.8	0.052	1.3	3.00	76	50	222		100	1000
ILT4S-C	14.7	373	0.190	4.8	0.052	1.3	4.00	102	50	222		100	1000

Light-Heavy Cross Section – Plenum-Rated

ILT4LH-TL	14.8	376	0.300	7.6	0.075	1.9	4.00	102	120	534	GTH-E, GS4H, GS4EH, PTH, STH2, ST3EH	250	2500
ILT6LH-C	21.2	538	0.300	7.6	0.075	1.9	6.00	152	120	534		100	2000

Weather Resistant Nylon 6.6

Standard Cross Section

ILT2S-C0	8.3	211	0.190	4.8	0.052	1.3	1.88	48	50	222	GTS-E, GS2B, GTH-E, GS4H, PTS, PTH, PPTS, STS2, STH2	100	1000
ILT3S-C0	11.5	292	0.190	4.8	0.052	1.3	3.00	76	50	222		100	1000
ILT4S-C0	14.7	373	0.190	4.8	0.052	1.3	4.00	102	50	222		100	1000

Light-Heavy Cross Section

ILT4LH-TL0	14.8	376	0.190	7.6	0.075	1.9	4.00	102	120	534	GTH-E, GS4H, GS4EH, PTH, STH2, ST3EH	250	2500
ILT6LH-C0	21.2	538	0.300	7.6	0.075	1.9	6.00	152	120	534		100	2000

Weather resistant nylon 6.6 cable ties are UL Listed, and CSA Certified except ILT4LH/6LH.