

General data

| | |
|-------------------------------------|--|
| Dimensional class: | low |
| Standard colour: | green |
| Pitches: | metric 3.5 mm, 7 mm (.138 in, .276 in) |
| Stripping length: | 8.5 ÷ 10 mm (.335 ÷ .394 in) |
| Operating temperature range: | -40 °C ÷ +105 °C (-40 °F ÷ +221 °F) |
| Contact resistance: | <15 mΩ |
| Insulation resistance: | >10 ⁹ Ω (500V DC) |
| Insulating material group: | I (CTI ≥ 600V) |

Certifications

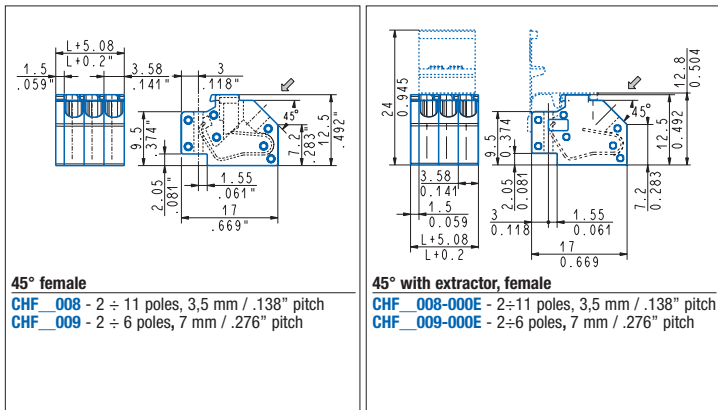
UL (n. E167473)
150 V - 2 A - 24÷16 AWG for 3.5 mm pitch
300 V - 2 A - 24÷16 AWG for 7 mm pitch

Data according to

IEC EN 61984
150 V - 4 A - 0.5÷1.5 mm² for 3.5 mm pitch
300 V - 4 A - 0.5÷1.5 mm² for 7 mm pitch

Application values for end-use equipment have to be in accordance to norms and applicable to it. The certifications of some product's versions could be pending, for more detailed and updated data please refer to our web site **www.sauro.net** or your representative Sales Manager

Please see "CONNECTORS COMBINATIONS"

**Usable with:**

CLM_0

Page 58

CLMH_0

Page 58

