

General data

Dimensional class: low Standard colour: green

Pitches: metric 5 mm (.197 in)

Screw dimension:

М3 Recommended/highest tightening torque: 0.5 Nm (4.42 lbf·in) Stripping length:

6 mm (.24 in) -40 °C ÷ +105 °C (-40 °F ÷ +221 °F) Operating temperature range:

Contact resistance: <15 m Ω Insulation resistance: $>10^{9} \Omega$ (500V DC) Insulating material group: $I (CTI \ge 600V)$

Certifications


UL (n. pending) 300 V - 10 A - 28÷16 AWG


Application values for end-use equipment have to be in accordance to norms and applicable to it. The certifications of some product's versions could be pending, for more detailed and updated data please refer to our web site **www.sauro.net** or your representative Sales Manager

Please see "CONNECTORS COMBINATIONS"





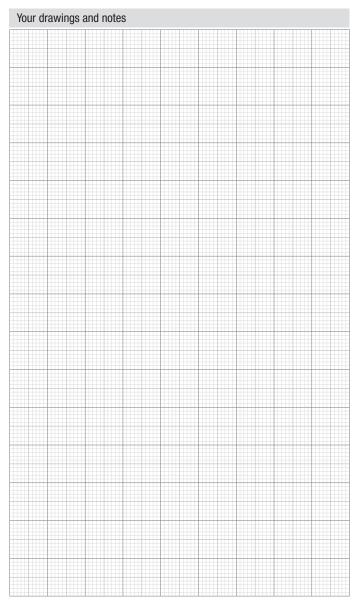



Usable with:

CSM	CSMH	CSMD
Page 53	Page 53	Page 54





