


Data sheet Product ICK S 10 x 10 x 6,5

Heatsinks and active heatsinks for processors>Pin heatsinks
10 x 10 x 6,5 mm, pin heatsinks quadratic

Features

| | |
|------------------------------|---|
| design: | rectangle |
| way of fixation: | <ul style="list-style-type: none"> • therm. conductive foil • therm. cond. adhesive |
| socket: | universal |
| suitable for processor type: | universal |
| width: | 10 mm |
| height: | 6.5 mm |
| plate thickness: | 2 mm |
| weight: | 1 g |
| length: | 10 mm |
| thermal resistance: | 25 - 18 K/W |
| dissipation loss: | 2.5 W |
| surface: | Al-natural |

Technical Drawing

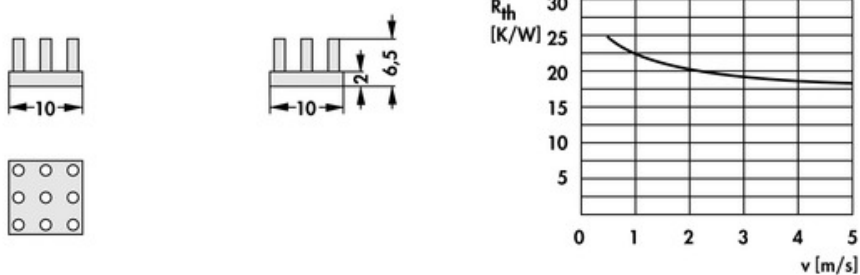

Fischer Elektronik GmbH & Co. KG
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
58511 Lüdenscheid

Telefon +49 2351 435-0
Telefax +49 2351 45754

info@fischerelektronik.de
www.fischerelektronik.de




Data sheet Product ICK S 10 x 10 x 10

Heatsinks and active heatsinks for processors>Pin heatsinks
10 x 10 x 10 mm, pin heatsinks quadratic

Features

| | |
|------------------------------|---|
| design: | rectangle |
| way of fixation: | <ul style="list-style-type: none"> • therm. conductive foil • therm. cond. adhesive |
| socket: | universal |
| suitable for processor type: | universal |
| width: | 10 mm |
| height: | 10 mm |
| plate thickness: | 2 mm |
| weight: | 1 g |
| length: | 10 mm |
| thermal resistance: | 23.75 - 16.75 K/W |
| dissipation loss: | 2.6 W |
| surface: | Al-natural |

Technical Drawing

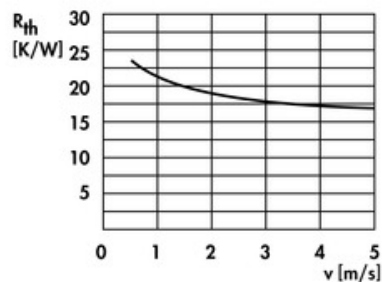

Fischer Elektronik GmbH & Co. KG
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
58511 Lüdenscheid

Telefon +49 2351 435-0
Telefax +49 2351 45754

info@fischerelektronik.de
www.fischerelektronik.de




Data sheet Product ICK S 10 x 10 x 12,5

Heatsinks and active heatsinks for processors>Pin heatsinks
10 x 10 x 12.5 mm, pin heatsinks quadratic

Features

| | |
|------------------------------|---|
| design: | rectangle |
| way of fixation: | <ul style="list-style-type: none"> • therm. conductive foil • therm. cond. adhesive |
| socket: | universal |
| suitable for processor type: | universal |
| width: | 10 mm |
| height: | 12.5 mm |
| plate thickness: | 2 mm |
| weight: | 1.3 g |
| length: | 10 mm |
| thermal resistance: | 22.5 - 15.5 K/W |
| dissipation loss: | 2.8 W |
| surface: | Al-natural |

Technical Drawing

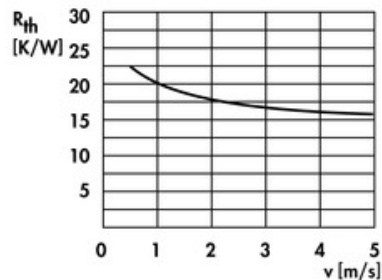

Fischer Elektronik GmbH & Co. KG
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
58511 Lüdenscheid

Telefon +49 2351 435-0
Telefax +49 2351 45754

info@fischerelektronik.de
www.fischerelektronik.de




Data sheet Product ICK S 10 x 10 x 18,5

Heatsinks and active heatsinks for processors>Pin heatsinks
10 x 10 x 18.5 mm, pin heatsinks quadratic

Features

| | |
|------------------------------|---|
| design: | rectangle |
| way of fixation: | <ul style="list-style-type: none"> • therm. conductive foil • therm. cond. adhesive |
| socket: | universal |
| suitable for processor type: | universal |
| width: | 10 mm |
| height: | 18.5 mm |
| plate thickness: | 2 mm |
| weight: | 1.3 g |
| length: | 10 mm |
| thermal resistance: | 21.75 - 14.75 K/W |
| dissipation loss: | 3 W |
| surface: | Al-natural |

Technical Drawing

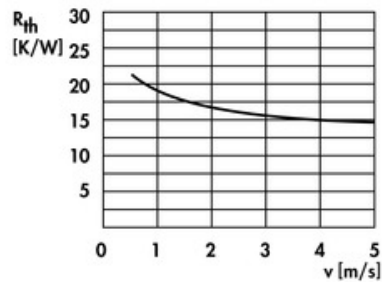

Fischer Elektronik GmbH & Co. KG
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
58511 Lüdenscheid

Telefon +49 2351 435-0
Telefax +49 2351 45754

info@fischerelektronik.de
www.fischerelektronik.de