


Data sheet Product ICK S 36 x 36 x 10

Heatsinks and active heatsinks for processors>Pin heatsinks
36 x 36 x 10 mm, pin heatsinks quadratic

Features

| | |
|------------------------------|---|
| design: | rectangle |
| way of fixation: | <ul style="list-style-type: none"> • therm. conductive foil • therm. cond. adhesive |
| socket: | universal |
| suitable for processor type: | universal |
| width: | 36.4 mm |
| height: | 10 mm |
| plate thickness: | 3.5 mm |
| weight: | 17 g |
| length: | 36.4 mm |
| thermal resistance: | 4.7 - 1.75 K/W |
| dissipation loss: | 16 W |
| surface: | Al-natural |

Technical Drawing

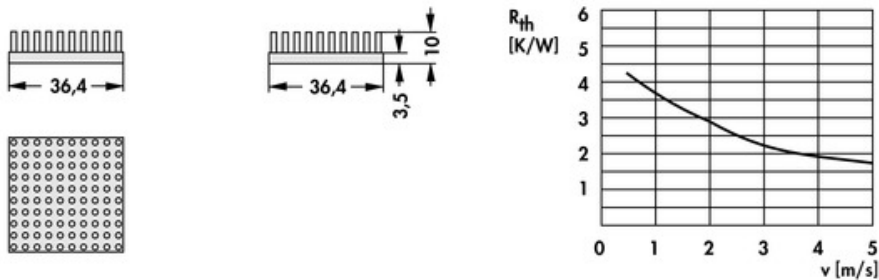

Fischer Elektronik GmbH & Co. KG
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
58511 Lüdenscheid

Telefon +49 2351 435-0
Telefax +49 2351 45754

info@fischerelektronik.de
www.fischerelektronik.de


Data sheet Product ICK S 36 x 36 x 15

Heatsinks and active heatsinks for processors>Pin heatsinks
36 x 36 x 15 mm, pin heatsinks quadratic

Features

| | |
|------------------------------|---|
| design: | rectangle |
| way of fixation: | <ul style="list-style-type: none"> • therm. conductive foil • therm. cond. adhesive |
| socket: | universal |
| suitable for processor type: | universal |
| width: | 36.4 mm |
| height: | 15 mm |
| plate thickness: | 3.5 mm |
| weight: | 20 g |
| length: | 36.4 mm |
| thermal resistance: | 3.9 - 1.25 K/W |
| dissipation loss: | 19.2 W |
| surface: | Al-natural |

Technical Drawing

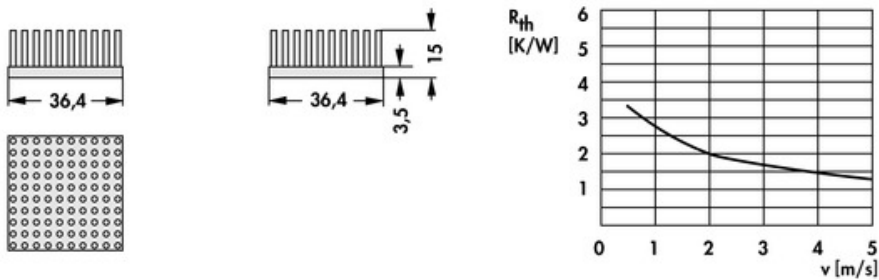

Fischer Elektronik GmbH & Co. KG
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
58511 Lüdenscheid

Telefon +49 2351 435-0
Telefax +49 2351 45754

info@fischerelektronik.de
www.fischerelektronik.de


Data sheet Product ICK S 36 x 36 x 20

Heatsinks and active heatsinks for processors>Pin heatsinks
36 x 36 x 20 mm, pin heatsinks quadratic

Features

| | |
|------------------------------|---|
| design: | rectangle |
| way of fixation: | <ul style="list-style-type: none"> • therm. conductive foil • therm. cond. adhesive |
| socket: | universal |
| suitable for processor type: | universal |
| width: | 36.4 mm |
| height: | 20 mm |
| plate thickness: | 3.5 mm |
| weight: | 24 g |
| length: | 36.4 mm |
| thermal resistance: | 3.2 - 0.95 K/W |
| dissipation loss: | 22 W |
| surface: | Al-natural |

Technical Drawing

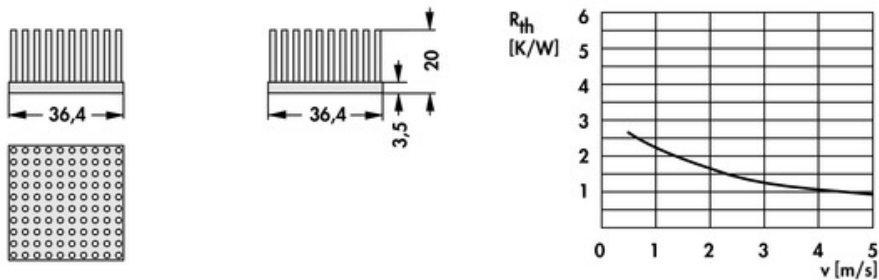

Fischer Elektronik GmbH & Co. KG
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
58511 Lüdenscheid

Telefon +49 2351 435-0
Telefax +49 2351 45754

info@fischerelektronik.de
www.fischerelektronik.de


Data sheet Product ICK S 36 x 36 x 30

Heatsinks and active heatsinks for processors>Pin heatsinks
36 x 36 x 30 mm, pin heatsinks quadratic

Features

| | |
|------------------------------|---|
| design: | rectangle |
| way of fixation: | <ul style="list-style-type: none"> • therm. conductive foil • therm. cond. adhesive |
| socket: | universal |
| suitable for processor type: | universal |
| width: | 36.4 mm |
| height: | 30 mm |
| plate thickness: | 3.5 mm |
| weight: | 24.4 g |
| length: | 36.4 mm |
| thermal resistance: | 2.5 - 0.7 K/W |
| dissipation loss: | 23.4 W |
| surface: | Al-natural |

Technical Drawing

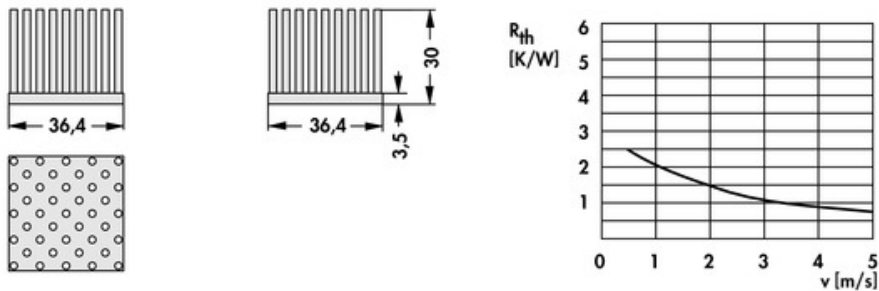

Fischer Elektronik GmbH & Co. KG
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
58511 Lüdenscheid

Telefon +49 2351 435-0
Telefax +49 2351 45754

info@fischerelektronik.de
www.fischerelektronik.de