


## Data sheet Product ICK S 40 x 40 x 7,5

Heatsinks and active heatsinks for processors>Pin heatsinks  
40 x 40 x 7.5 mm, pin heatsinks quadratic

### Features

design:	rectangle
way of fixation:	<ul style="list-style-type: none"> <li>• therm. conductive foil</li> <li>• therm. cond. adhesive</li> </ul>
socket:	universal
suitable for processor type:	universal
width:	40 mm
height:	7.5 mm
plate thickness:	3.7 mm
weight:	18 g
length:	40 mm
thermal resistance:	4.85 K/W
dissipation loss:	15.5 W
surface:	Al-natural

### Technical Drawing

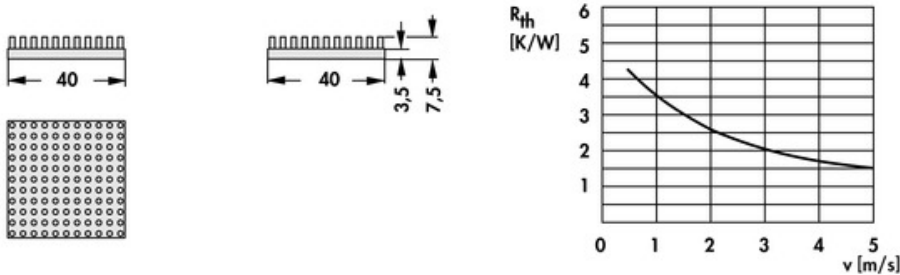

Fischer Elektronik GmbH & Co. KG  
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28  
58511 Lüdenscheid

Telefon +49 2351 435-0  
Telefax +49 2351 45754

info@fischerelektronik.de  
www.fischerelektronik.de


## Data sheet Product ICK S 40 x 40 x 10

Heatsinks and active heatsinks for processors>Pin heatsinks  
40 x 40 x 10 mm, pin heatsinks quadratic

### Features

design:	rectangle
way of fixation:	<ul style="list-style-type: none"> <li>• therm. conductive foil</li> <li>• therm. cond. adhesive</li> </ul>
socket:	universal
suitable for processor type:	universal
width:	40 mm
height:	10 mm
plate thickness:	3.5 mm
weight:	21 g
length:	40 mm
thermal resistance:	4.6 - 1.25 K/W
dissipation loss:	16.3 W
surface:	Al-natural

### Technical Drawing

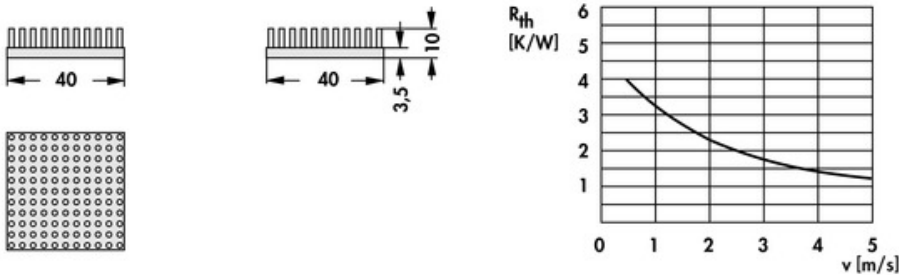

Fischer Elektronik GmbH & Co. KG  
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28  
58511 Lüdenscheid

Telefon +49 2351 435-0  
Telefax +49 2351 45754

info@fischerelektronik.de  
www.fischerelektronik.de


## Data sheet Product ICK S 40 x 40 x 20

Heatsinks and active heatsinks for processors>Pin heatsinks  
40 x 40 x 20 mm, pin heatsinks quadratic

### Features

design:	rectangle
way of fixation:	<ul style="list-style-type: none"> <li>• therm. conductive foil</li> <li>• therm. cond. adhesive</li> </ul>
socket:	universal
suitable for processor type:	universal
width:	40 mm
height:	20 mm
plate thickness:	3.5 mm
weight:	29 g
length:	40 mm
thermal resistance:	3.5 - 0.9 K/W
dissipation loss:	21.4 W
surface:	Al-natural

### Technical Drawing

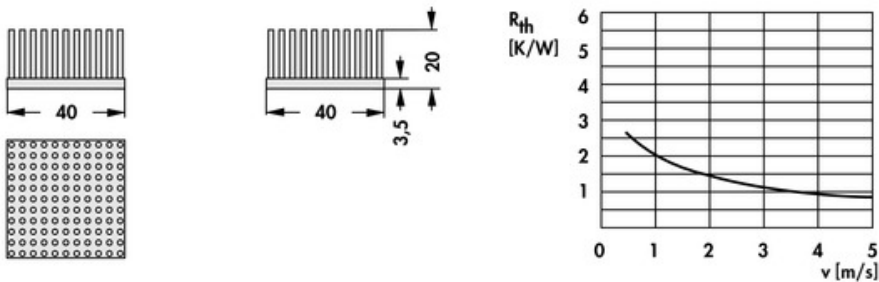

Fischer Elektronik GmbH & Co. KG  
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28  
58511 Lüdenscheid

Telefon +49 2351 435-0  
Telefax +49 2351 45754

info@fischerelektronik.de  
www.fischerelektronik.de




## Data sheet Product ICK S 40 x 40 x 25

Heatsinks and active heatsinks for processors>Pin heatsinks  
40 x 40 x 25 mm, pin heatsinks quadratic

### Features

design:	rectangle
way of fixation:	<ul style="list-style-type: none"> <li>• therm. conductive foil</li> <li>• therm. cond. adhesive</li> </ul>
socket:	universal
suitable for processor type:	universal
width:	40 mm
height:	25 mm
plate thickness:	3.5 mm
weight:	37 g
length:	40 mm
thermal resistance:	3.1 - 1.25 K/W
dissipation loss:	23.7 W
surface:	Al-natural

### Technical Drawing

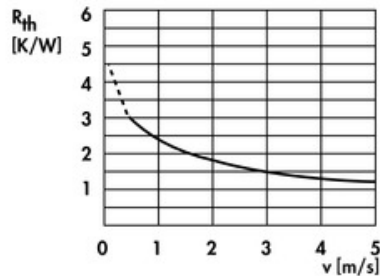

Fischer Elektronik GmbH & Co. KG  
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28  
58511 Lüdenscheid

Telefon +49 2351 435-0  
Telefax +49 2351 45754

info@fischerelektronik.de  
www.fischerelektronik.de