




Data sheet Product LA_V21_




Cooling aggregates>Cooling aggregates with axial fan
92 x 92 mm, with axial fan and air-flow chamber

Features

width:	92 mm
height:	93 mm
length:	100 mm / 150 mm / 200 mm / 250 mm / 300 mm / 400 mm
thermal resistance:	0.18 - 0.07 K/W
surface:	<ul style="list-style-type: none"> • raw degreased aluminium • mounting area(s) milled flat
operating voltage of the fan motor:	<ul style="list-style-type: none"> • 24 V DC • 230 V AC

Technical Drawing

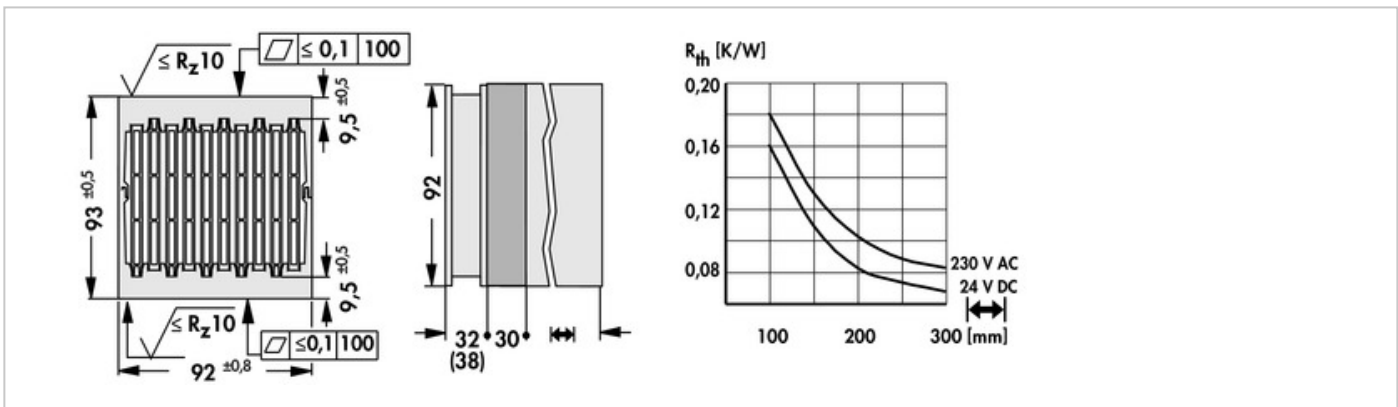

Fan**ebmpapst, kugelgelagert, 24 V DC**

type:	ebmpapst 3314 NHH
dimensions:	92x92x32 mm
tension:	24 V DC
power inout:	3.4 W
max. air volume:	107 m³/h
temperature range:	-20°C... 75°C
speed:	3,450 min⁻¹
noise level:	42 dB(A)
weight:	190 g
failure rate (L ₁₀):	L₁₀ < 57,500 h (40°C)

ebmpapst, kugelgelagert, 230 V AC

type:	ebmpapst 3656
dimensions:	92x92x38 mm
tension:	230 V AC
power inout:	12 W
max. air volume:	75 m³/h
temperature range:	-40°C... +75°C
speed:	2,700 min⁻¹
noise level:	37 dB(A)
weight:	420 g
failure rate (L ₁₀):	L₁₀ < 52,500 h (40°C)