

## Data sheet Product SK16\_




Profile heatsinks and fluid coolers>Standard extruded heatsinks  
104,8 x 25,4 mm, mounting part IS 3

### Features

|                     |  |
|---------------------|--|
| thermal resistance: | <b>3 - 1.5 K/W</b>   |
| drilling pattern:   | <ul style="list-style-type: none"> <li>• TO 3</li> <li>• CB</li> </ul>   |
| surface:            | <ul style="list-style-type: none"> <li>• black anodised</li> <li>• natural colour anodised</li> <li>• raw degreased aluminium</li> </ul> |
| height:             | <b>25.4 mm</b>   |
| width:              | <b>104.8 mm</b>  |
| length:             | <b>75 mm / 1000 mm</b>   |
| plate thickness:    | <b>4.7 mm</b>  |

### Technical Drawing

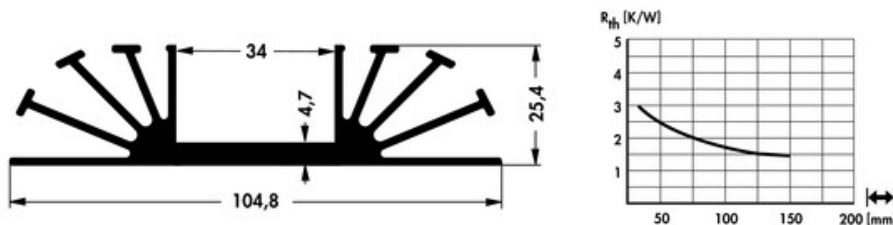

**Fischer Elektronik GmbH & Co. KG**  
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28  
58511 Lüdenscheid

Telefon +49 2351 435-0  
Telefax +49 2351 45754

info@fischerelektronik.de  
www.fischerelektronik.de