


**Pan-Ty® Push Mount Ties**

- Natural nylon material for indoor use
- Weather resistant material has greater resistance to damage caused by ultraviolet light – indoor or outdoor use
- Heat stabilized material for high temperature applications up to 239°F (115°C) – indoor use
- *Wingless* design allows tie to be used in confined spaces
- Cable tie, mount, and fastener in a single part

- Economical push mount ties are used to attach bundles to another surface such as a flat panel
- Anchor is easily pressed into a pre-formed hole and locks in place
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

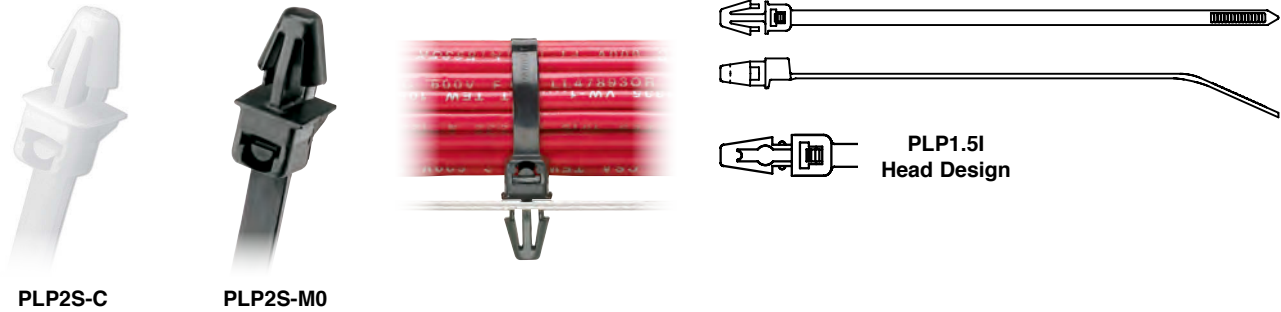

Part Number	Length		Width		Thickness		Nominal Hole Dia.		Max. Panel Thickness		Max. Bundle Dia.		Min. Loop Tensile Str.		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm	Lbs.	N			

**Nylon 6.6**

**Intermediate Cross Section**

PLP1.5I-C	6.1	156	0.135	3.4	0.045	1.1	0.187	4.7	0.093	2.4	1.25	32	40	178	GTS-E, GS2B, PTS, PPTS, STS2	100	1000
-----------	-----	-----	-------	-----	-------	-----	-------	-----	-------	-----	------	----	----	-----	------------------------------	-----	------

**Standard Cross Section**

PLP1S-M	5.3	135	0.180	4.6	0.050	1.3	0.250	6.4	0.125	3.2	1.00	25	50	222	GTS-E, GS2B, GTH-E, GS4H, PTS, PTH, PPTS, STS2, STH2	1000	10000
PLP1.5S-M	6.7	170	0.180	4.6	0.050	1.3	0.250	6.4	0.125	3.2	1.50	38	50	222		1000	10000
PLP2S-C	7.9	200	0.180	4.6	0.050	1.3	0.250	6.4	0.125	3.2	1.75	45	50	222		100	1000

**Weather Resistant Nylon 6.6**

**Intermediate Cross Section**

PLP1.5I-M0	6.1	156	0.135	3.4	0.045	1.1	0.187	4.7	0.093	2.4	1.25	32	40	178	GTS-E, GS2B, PTS, PPTS, STS2	1000	25000
------------	-----	-----	-------	-----	-------	-----	-------	-----	-------	-----	------	----	----	-----	------------------------------	------	-------

**Standard Cross Section**

PLP1S-M0	5.3	135	0.180	4.6	0.050	1.3	0.250	6.4	0.125	3.2	1.00	25	50	222	GTS-E, GS2B, GTH-E, GS4H, PTS, PTH, PPTS, STS2, STH2	1000	10000
PLP2S-M0	7.9	200	0.180	4.6	0.050	1.3	0.250	6.4	0.125	3.2	1.75	45	50	222		1000	10000

**Heat Stabilized Nylon 6.6**

**Intermediate Cross Section**

PLP1.5I-M30	6.1	156	0.135	3.4	0.045	1.1	0.187	4.7	0.093	2.4	1.25	32	40	178	GTS-E, GS2B, PTS, PPTS, STS2	1000	25000
-------------	-----	-----	-------	-----	-------	-----	-------	-----	-------	-----	------	----	----	-----	------------------------------	------	-------

**Standard Cross Section**

PLP1S-M30	5.3	135	0.180	4.6	0.050	1.3	0.250	6.4	0.125	3.2	1.00	25	50	222	GTS-E, GS2B, GTH-E, GS4H, PTS, PTH, PPTS, STS2, STH2	1000	10000
PLP2S-M30	7.9	200	0.180	4.6	0.050	1.3	0.250	6.4	0.125	3.2	1.75	45	50	222		1000	10000