

Data sheet Product FK 244 08 D2 PAK

Board Level heatsinks>Heatsinks for D PAK and others

- direct PCB mounting thru solderable surface
- available standard packing: loose parts (**bulk goods**) or reel (**TR** = tape and reel)
- **tape width:** 44 mm, **reel diameter:** 330 mm, **quantity:** FK 244 08 = 450, FK 244 13 = 200


Features

for transistor:

- SOT 223
- D³ PAK (TO 268)
- SO-14
- D² PAK (TO 263)
- Power SO 10
- D PAK (TO 252)
- SO-16
- SO-8

| | |
|---------------------|--------------------|
| width: | 26 mm |
| height: | 10 mm |
| length: | 8 mm |
| thermal resistance: | 29.3 K/W |
| surface: | solderable surface |
| material: | copper (Cu) |
| material thickness: | 0.6 mm |

Technical Drawing

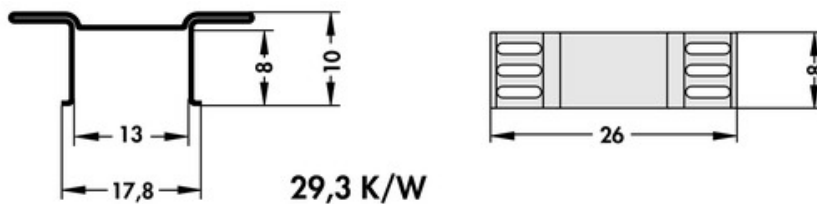

Fischer Elektronik GmbH & Co. KG
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
58511 Lüdenscheid

Telefon +49 2351 435-0
Telefax +49 2351 45754

info@fischerelektronik.de
www.fischerelektronik.de

Data sheet Product FK 244 13 D2 PAK

Board Level heatsinks>Heatsinks for D PAK and others

- direct PCB mounting thru solderable surface
- available standard packing: loose parts (**bulk goods**) or reel (**TR** = tape and reel)
- **tape width:** 44 mm, **reel diameter:** 330 mm, **quantity:** FK 244 08 = 450, FK 244 13 = 200


Features

for transistor:

- SOT 223
- D³ PAK (TO 268)
- SO-14
- D² PAK (TO 263)
- Power SO 10
- D PAK (TO 252)
- SO-16
- SO-8

| | |
|---------------------|--------------------|
| width: | 26 mm |
| height: | 10 mm |
| length: | 13 mm |
| thermal resistance: | 22.8 K/W |
| surface: | solderable surface |
| material: | copper (Cu) |
| material thickness: | 0.6 mm |

Technical Drawing

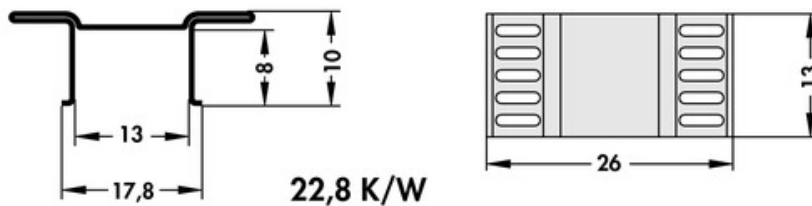

Fischer Elektronik GmbH & Co. KG
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
58511 Lüdenscheid

Telefon +49 2351 435-0
Telefax +49 2351 45754

info@fischerelektronik.de
www.fischerelektronik.de